

PERFORM®



Lead Free Flashing

The future is lead free. Perform is environmentally friendly as it is made of aluminium sheeting coated with polymer rubber. It is 1/3 of the weight of lead which allows for fast and easy mounting.

Product Code	Length	Width	Weight	Carton QTY
PFR 4-300	4mtr or 13'	300mm or 12"	4.32kg or 9.5lbs	6
PFR 4-400	4mtr or 13'	400mm or 15"	5.76kg or 12.67lbs	6
PFR 4-450	4mtr or 13'	450mm or 18"	6.48kg or 14.26lbs	6
PFR 4-600	4mtr or 13'	600mm or 24"	8.64kg or 19.16lbs	6

Available in Black, Grey and Red. Also available in a range of sheets.

Dekstrip®



Stretches to Any Shape, Seals & Stays

Forms and stretches to solve all your flashing problems. Dekstrip expandable edge flashing is the answer to flashing large, curved award profiles and penetrations. It ideal for box gutter expansion joints and is the fast, easy & most effective way to flash a bullnose.

Product Code	Length	Width	Carton QTY
DS23-180	23m or 75'	180mm or 7"	1
DS23-235	23m or 75'	235mm or 9"	1
DS23-305	23m or 75'	305mm or 12"	1
DS10-180	10m or 33'	180mm or 7"	1
DS10-235	10m or 33'	235mm or 9"	1
DS10-305	10m or 33'	305mm or 12"	1
DS3-235	3m or 10'	235mm or 9"	1
DS15-450	15m or 50'	450mm or 18"	1

Available in Grey EPDM.

Dekseal® True Blue® Fluted and smooth



Offering both consistency and longevity, Dekseal True Blue washers come in two styles to suit your assembly process and application needs.

- ✓ Non-Conductive – low carbon prevents corrosion problems
- ✓ Superior quality EPDM – made to last
- ✓ Fast to assemble – quick to fit, stay in place during transportation
- ✓ UV and Ozone resistant – maximum life span in harsh environments



Description	To Suit Fastener	Bore Dia (0.2mm)	Outer Dia (0.5mm)	Thickness (0.4mm)	Colour	Box QTY	Part Number
SMOOTH							
8# Smooth	8#	3.9	7.4	2.0	Black	100,000	DT-S00-B08-A
8# Smooth B	8#	2.6	9.3	2.0	Black	100,000	DT-S00-B08-B
10# Smooth A	10#	4.2	8.5	2.0	Black	100,000	DT-S00-B10-A
10# Smooth B	10#	4.5	8.7	3.0	Black	75,000	DT-S00-B10-B
10# Smooth C	10#	4.5	8.7	2.0	Black	100,000	DT-S00-B10-C
12# Smooth	12#	4.9	10.6	3.0	Black	50,000	DT-S00-B12-A
14# Smooth A	14#	5.6	10.6	3.0	Black	50,000	DT-S00-B14-A
14# Smooth B	14#	5.8	10.6	3.0	Black	50,000	DT-S00-B14-B

Description	To Suit Fastener	Bore Dia (0.2mm)	Flute Dia (0.2mm)	Outer Dia (0.5mm)	Thickness (0.4mm)	Colour	Box QTY	Part Number
FLUTE								
10# 5 Flute	10#	4.5	3.5	8.8	2.6	Black	50,000	DT-F05-B10-A
12# 5-Flute	12#	5.6	4.6	10.6	5.6	Black	50,000	DT-F05-B12-A
14# 6 Flute	14#	6.5	5.3	10.8	3.0	Black	50,000	DT-F06-B14-A

Dekseal® Engineered™ Fully moulded



Dekseal Engineered are a customised range designed to suit specific materials including metal, fibreglass and plastic – each washer has been designed to ensure weather – tightness on specific roofing systems.

- ✓ Engineered for precision – for a consistent fit and performance
- ✓ Weather tight fit every time- designed to stay strong
- ✓ Four styles- to suit a range of applications



Description	To Suit Fastener	Diameter x Thickness (mm)	Colour	Box QTY	Part Number
POLYCARB AND FIBREGLASS Dekseal®					
<i>For use on Polycarbonate and fibreglass roofing</i>					
22mm Polycarb	10/12#	22 x 8	Grey	10,000	DE-P22-G12-A
26mm Polycarb	12#	26 x 9	Grey	5,000	DE-P26-G12-A
32mm Polycarb	12#	32 x 9	Grey	5,000	DE-P32-G12-A
SPANDEK® / KLIPLOK® Dekseal®					
<i>Use with a pressed metal washer on Spandek®, Trimdek® and Klipok® type roofing</i>					
Spandek	14#	35 x 5	Black	5,000	DE-S35-B14
Klipok	14#	29 x 6	Black	10,000	DE-K29-B14
CUSTOM ORB® Dekseal®					
<i>Use with a pressed metal washer on custom orb type roofing</i>					
Custom Orb	14#	18 x 19	Black	10,000	DE-C18-B14-A

Dekfast® Multi Seal™ Metal backed



A unique washer design that forms a seal against the washer face of the fastener as well as the roof sheet. The design is self-aligning ensuring that even if the fastener is driven at an angle, the washer seals effectively in all four locations.


- ✓ Extra Strength – metal encapsulated in EPDM for real strength
- ✓ Four Sealing Points – unique design gives a perfect seal
- ✓ Wide Size range – from 12mm – 32mm
- ✓ No distortion – engineered to distribute the load



Description	Fastener	Diameter (mm)	Colour	Box QTY	Part Number
ALUMINIUM					
A12 – 10/12	10/12	12	Black	25,000	DM-A12-B12-A
A16 – 10/12	10/12	16	Black	15,000	DM-A16-B12-A
A16 – 12/14	12/14	16	Black	15,000	DM-A16-B14-A
A16 – 16	16	16	Black	15,000	DM-A16-B16-A
A19 – 12/14	12/14	19	Black	10,000	DM-A19-B14-A
A25 – 12/14	12/14	25	Black	5,000	DM-A25-B14-A
A32 – 12/14	12/14	32	Black	3,000	DM-A32-B14-A
GALVANISED					
G12 – 10/12	10/12	12	Black	25,000	DM-G12-B12-A
G16 – 10/12	10/12	16	Black	15,000	DM-G16-B12-A
G16 – 12/14	12/14	16	Black	15,000	DM-G16-B14-A
G19 – 12/14	12/14	19	Black	10,000	DM-G19-B14-A
G25 – 12/14	12/14	25	Black	5,000	DM-G25-B14-A
G32 – 12/14	12/14	32	Black	3,000	DM-G32-B14-A
STAINLESS STEEL					
S12 – 10/12	10/12	12	Black	25,000	DM-S12-B12-A
S16 – 10/12	10/12	16	Black	15,000	DM-S16-B12-A
S16 – 12/14	12/14	16	Black	15,000	DM-S16-B14-A
S19 – 12/14	12/14	19	Black	10,000	DM-S19-B14-A
S25 – 12/14	12/14	25	Black	5,000	DM-S25-B14-A

Need to flash it?

DEKS brings you the world's best flashing range

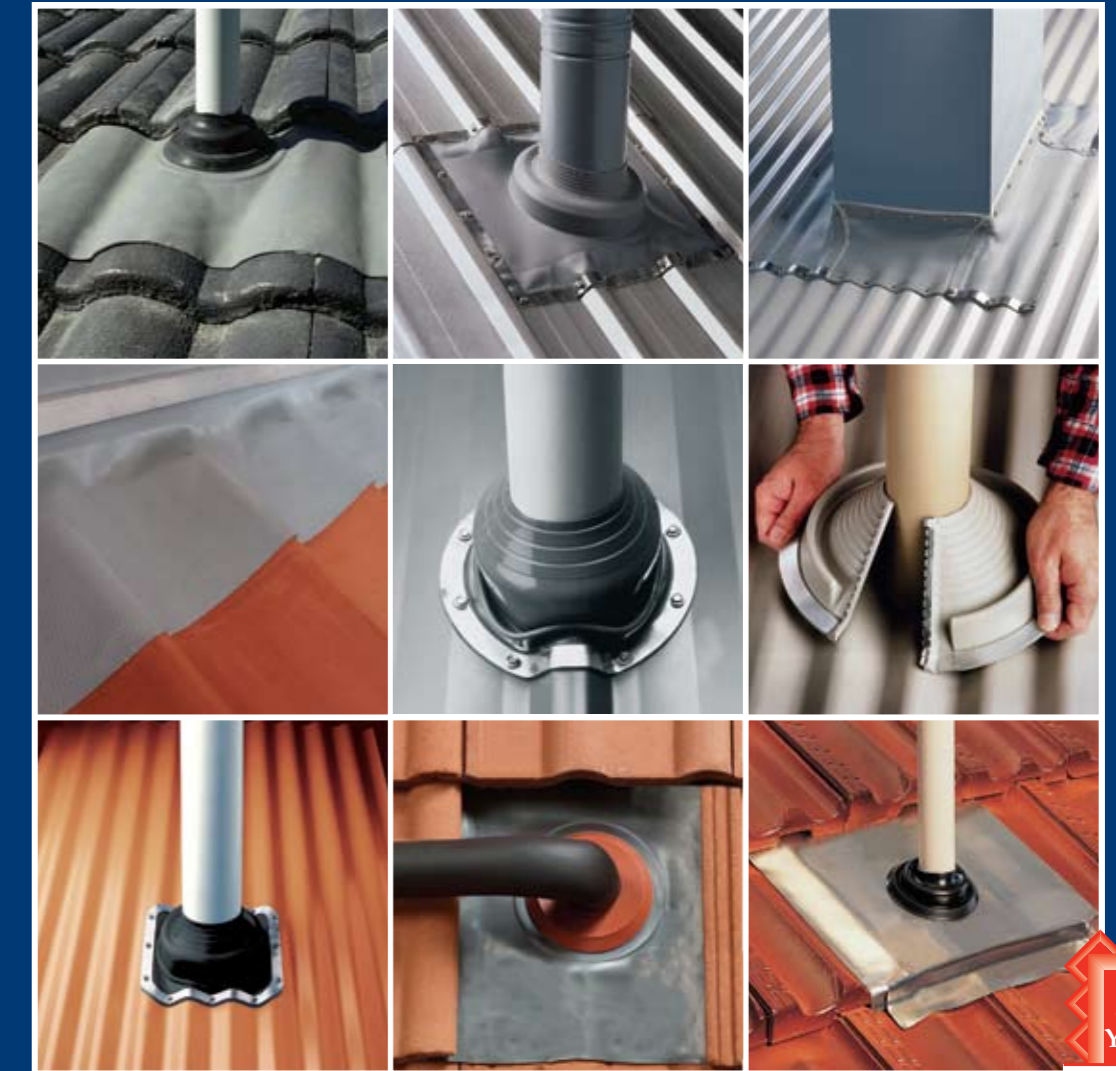

DEKS
A Skellerup Industries Company

- Metal Chimneys • Hot & Cold Flues • Vents
- Refrigeration/air con connections • Antennas
- Conduits • Ducts • Wiring/cables

www.deks.com.au

Dektite® Premium™



Perfect for flashing pipes on metal roofs

A multi-application flashing with a highly durable EPDM cone and base, edged with a flexible aluminium strip, flashes hot or cold flues and pipes on metal roofs. The square base fits any prepared hole on most roofs profiles.

Product Code	Pipe External	Base Sizes	Pitch
DFE 0-20	0-20mm	0 - 3/4"	70 x 70mm 2 3/4 x 2 3/4" 0-60° or 18/12
DFE 0-35	0-35mm	0 - 1 1/8"	99 x 99mm 4 x 4" 0-60° or 18/12
DFE 5-55	5-55mm	1/4 - 2 1/8"	137 x 137mm 5 1/2 x 5 1/2" 0-45° or 12/12
DFE 50-70	50-70mm	1/4 - 4 3/4"	218 x 218mm 8 1/2 x 8 1/2" 0-45° or 12/12
DFE 5-120	5-120mm	2 - 2 3/4"	177 x 177mm 7 x 7" 0-45° or 12/12
DFE 110-170	110-170mm	4 1/2 - 6 3/4"	284 x 284mm 11 1/4 x 11 1/4" 0-45° or 12/12
DFE 160-220	160-220mm	6 1/4 - 8 3/4"	365 x 365mm 14 1/4 x 14 1/4" 0-45° or 12/12
DFE 160-300	160-300mm	6 1/4 - 11 3/4"	453 x 453mm 17 3/4 x 17 3/4" 0-45° or 12/12
DFE 290-440	290-440mm	11 1/2 - 17 3/8"	581 x 581mm 23 x 23" 0-45° or 12/12

Available in Grey, Black EPDM and Red Silicone.

Dektite® Original



The original watertight flashing for metal roofs

The original watertight flashing designed to seal both hot and cold flues and pipes on metal roofs. A strong water tight seal and a strong flexible base with the aluminium band.

Product Code	Pipe external	Roof pitch	Product Code	Pipe external	Roof pitch
DF100	0-35mm	0-1 1/2"	DF201RE	5-65mm	1/4 - 2 1/2"
DF101	5-65mm	1/4 - 2 1/2"	DF202RE	45-80mm	1 3/4 - 3 1/4"
DF102	45-80mm	1 3/4 - 3 1/4"	DF203RE	5-127mm	1/4 - 5"
DF103	5-127mm	1/4 - 5"	DF204RE	73-160mm	3 - 6 1/4"
DF104	73-160mm	3 - 6 1/4"	DF205RE	108-190mm	4 1/4 - 7 1/2"
DF105	108-190mm	4 1/4 - 7 1/2"	DF206RE	125-230mm	5 - 9"
DF106	125-230mm	5 - 9"	DF207RE	150-280mm	6 - 11"
DF107	150-280mm	6 - 11"	DF208RE	175-330mm	7 - 13"
DF108	175-330mm	7 - 13"	DF209RE	254-483mm	10 - 19"
DF109	254-483mm	10 - 19"			

EPDM will withstand constant temperature at the roofline of -50°C to 115°C (-122°F to 239°F) & up to 150°C (302°F) intermittently.

Silicone will withstand constant temperature at the roofline of -50°C to 200°C (-112°F to 392°F) & up to 250°C (482°F) intermittently.

Dektite® Combo



Flash over or around

A standard Dektite and Retrofit all in one

Product Code	Pipe External	Base Sizes	Pitch
DC101	5-60mm	1/4 - 2 1/2"	139 x 139mm 5 1/2 x 5 1/2" 0-60° OR 18/12
DC102	45-80mm	1 3/4 - 3 1/4"	179 x 179mm 7 x 7" 0-45° OR 12/12
DC103	5-125mm	1/4 - 5"	216 x 216mm 8 1/2 x 8 1/2" 0-45° OR 12/12
DC104	73-160mm	3-7"	285 x 285mm 11 1/4 x 11 1/4" 0-45° OR 12/12
DC105	108-190mm	4 1/4 - 7 1/2"	366 x 366mm 14 1/4 x 14 1/4" 0-60° OR 18/12
DC106	125-230mm	5-9"	366 x 366mm 14 1/4 x 14 1/4" 0-45° OR 12/12
DC107	150-280mm	6-11"	454 x 454mm 17 3/4 x 17 3/4" 0-45° OR 12/12
DC108	175-330mm	7-13"	454 x 454mm 17 3/4 x 17 3/4" 0-45° OR 12/12
DC109	240-508mm	9 1/2 - 20"	685 x 685mm 27 x 27" 0-45° OR 12/12
DC Clip	25 Twins		

Combo Square Selection Guide

Product Code	Pipe External	Base Sizes	Pitch
DCS103	20-125mm	3/4-5"	139 x 139mm 5 1/2 X 5 1/2" 0-45° OR 12/12

Available in Black EPDM.

Dektite® Ezi-Seal™



Forget Silicone just screw it down

Features a revolutionary non-absorbent and non porous sponge gasket that seals by compression, even in wet conditions, it hugs the roof line to provide a watertight seal without the need for silicone sealant.

Product Code	Pipe External	Base Sizes	Pitch
DFE 0-35EZ	0-35mm	0 - 3/4"	99 x 99mm 4 x 4" 0-60° OR 18/12
DFE 5-55EZ	5-55mm	1/4 - 2 1/8"	137 x 137mm 5 1/2 x 5 1/2" 0-45° OR 12/12
DFE 50-70EZ	50-70mm	2 - 2 3/4"	178 x 178mm 7 x 7" 0-45° OR 12/12
DFE 5-120EZ	5-120mm	1/4 - 4 3/4"	218 x 218mm 8 1/2 x 8 1/2" 0-45° OR 12/12
DFE 110-170EZ	110-170mm	4 1/2 - 6 3/4"	284 x 284mm 11 1/4 x 11 1/4" 0-45° OR 12/12
DFE 160-220EZ	160-220mm	6 1/4 - 8 3/4"	365 x 365mm 14 1/4 x 14 1/4" 0-45° OR 12/12
DFE 160-300EZ	160-300mm	6 1/4 - 11 3/4"	453 x 453mm 17 3/4 x 17 3/4" 0-45° OR 12/12
DFE 290-440EZ	290-440mm	11 1/2 - 17 3/8"	581 x 581mm 23 x 23" 0-45° OR 12/12

Available in Black EPDM.

Dektite® Soaker™



For Hi/Low Roof Pitches

The large base of a Dektite Soaker dramatically reduces rainwater back up on very low or very high roof pitches and deep ribbed roofing profiles.

Product Code	Pipe External	Base Sizes	Pitch	Carton QTY
DF602	75-155mm	3 - 6"	410 x 360mm 16 x 14" 0-60° or 18/12	2
DF603	114-254mm	4 1/2 - 10"	485 x 460mm 19 x 18" 0-60° or 18/12	2
DF605	254-406mm	10 - 16"	708 x 640mm 27 3/4 x 25" 0-60° or 18/12	2
DF606	380-610mm	15 - 24"	110 x 905mm 39 1/4 x 35 1/2" 0-60° or 18/12	1

Available in Grey EPDM and Red Silicone.

Retrofit Original



For Repairs & Difficult To Access Pipes

Most commonly used when flashing around an existing penetration when going over the top of pipe material is not an option. The unique patented zip lock does not require separate clips – just clamp it together.

Product Code	Pipe External	Base Sizes	Pitch
RF 801	20-70mm	3/4 - 2 3/4"	160mm 6 1/2" 0-40° or 10/12
RF 802	50-190mm	2 - 7 1/2"	273mm 10 9/16" 0-40° or 10/12
RF 803	85-255mm	3 1/4 - 10"	369mm 14 1/2" 0-40° or 10/12
RFS 4	235-425mm	9 1/4 - 16 3/4"	762 x 680mm 30 x 26 3/4" 0-40° or 10/12
RF 901	20-70mm	3/4 - 2 3/4"	160mm 6 1/2" 0-40° or 10/12
RF 902	50-190mm	2 - 7 1/2"	273mm 10 9/16" 0-40° or 10/12
RF 903	85-255mm	3 1/4 - 10"	369mm 14 1/2" 0-40° or 10/12
RF S24	235-425mm	9 1/4 - 16 3/4"	762 x 680mm 30 x 26 3/4" 0-40° or 10/12

Available in Grey EPDM and Red Silicone.

Aluminium



The SELDEK® Aluminium™ won't stain or corrode spouting and gutters. The EPDM cone, which is trimmed on site to fit, is ingeniously locked to a high grade and malleable 99.9% pure aluminium base.

Product Code	Pipe External	Base Sizes	Pitch	Carton QTY
SDAMiniB	0-30mm	0 - 1 1/2"	500x600mm 19 1/4 x 23 3/4" 0-45° or 12/12	3
SDA100B	12-70mm	1/2 - 2 3/4"	500x600mm 19 1/4 x 23 3/4" 0-45° or 12/12	3
SDA101B	50-170mm	2 - 6 3/4"	500x600mm 19 1/4 x 23 3/4" 0-45° or 12/12	3
SDA102B	110-200mm	4 1/2 - 8"	500x600mm 19 1/4 x 23 3/4" 0-45° or 12/12	3
SDA103B	160-300mm	6 1/4 - 11 3/4"	764x764mm 30 x 30" 0-45° or 12/12	5
SDA104B	300-450mm	12 - 17 3/4"	956x956mm 37 x 37" 0-45° or 12/12	5

Available in Black EPDM.

Dekform



Lead Flashings No Longer Required

Designed as an environmentally friendly product eliminating concerns caused by using lead. Designed to suit all tiled roof flashing applications. A great product choice when Rain Water Harvesting is in use. Keep your water clean from contamination.

Product Code	Pipe External	Sheet Size	Product Code	Pipe External	Sheet Size
DFM100GB	0-30mm	0 - 1 1/2"	DFM200GR	0-30mm	0 - 1 1/2"
DFM101GB	12-70mm	1/2 - 2 3/4"	DFM201GR	12-70mm	1/2 - 2 3/4"
DFM102GB	50-170mm	2 - 2 3/4"	DFM203GR	50-170mm	2 - 6 3/4"
DFM103GB	50-170mm	2 - 6 3/4"			
DFM108GB	175-330mm	7 - 13"			

Nu Lead



No more worries about unprotected lead

Combines a long – life weather resistant EPDM cone with grey primed Thermo-Baked Acrylic Primer coating. The unique thermo baked coating does not affect the lead's malleability, and prevents leaching onto the roof and into gutter, down pipes and the water table.

Product Code	Pipe External	Pitch	Product Code	Pipe External	Pitch
DNL100B	0-30mm	0 - 1 1/2"	DNL200RE	0-30mm	0 - 1 1/2"
DNL101B	12-70mm	1/2 - 2 3/4"	DNL201RE	12-70mm	1/2 - 2 3/4"
DNL102B	50-70mm	2 - 2 3/4"	DNL202RE	50-70mm	2 - 2 3/4"
DNL103B	50-170mm	2 - 6 3/4"	DNL203RE	50-170mm	2 - 6 3/4"
DNL108B	175-330mm	7 - 13"	DNL208RE	175-330mm	7 - 13"

Available in Red Silicone & Black EPDM with grey lead base.

Solar Solutions



Designed specifically for solar panel installation on both metal and tile roofs. Fast. Efficient. Safe.

Product Code	Pipe External	Base Sizes	Pitch	Carton QTY
DNL100B	0-30mm	0 - 1 1/2"	410 x 490mm 19 x 16" 0-45° or 12/12	4
DNL200RE	0-30mm	0 - 1 1/2"	410 x 490mm 19 x 16" 0-45° or 12/12	4
DFE 0-35	0-35mm	0 - 1 1/8"	99 x 99mm 4 x 4" 0-60° or 18/12	20
SDA100	12-70mm	1/2 - 2 3/4"	500 x 600mm 19 1/4 x 23 3/4" 0-60° or 18/12	20

Available in Black EPDM, DNL200 is Red Silicone for higher heat needs.

